




## Features

- Apply on RTC-1200
- Front-facing I/O: USB 2.0 x 2 with Protection Cover
- Downward-facing I/Os for Easy Cable Management: USB 3.2 Gen 1 x 2, RS-232 x 2, RJ45 GbE x 1, M12 DC-in x 1
- Wide Voltage Input: 9VDC ~ 36VDC via M12-5P Female Connector
- Power Adaptor: AC Power Adaptor (Default)
- Anti-theft lock with Key & VESA Mount Support

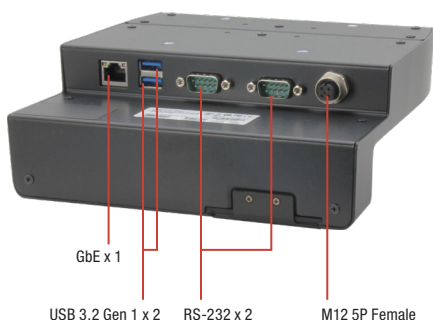


## Specifications

| System                       |                                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| I/O                          | Front-facing I/Os:<br>USB 2.0 x 2 with protection cover<br>Downward-facing I/Os:<br>USB 3.2 Gen 1 x 2<br>RS-232 x 2<br>RJ45 GbE x 1<br>M12 DC-in x 1 |
| DC Input                     | M12 5P Female (DC 9V to 36V)                                                                                                                         |
| LED Indicator                | Orange: DC in w/o Tablet<br>Blue: DC in w/ Tablet                                                                                                    |
| Others                       | Anti-theft lock with key & VESA mount support                                                                                                        |
| Mechanical                   |                                                                                                                                                      |
| Color                        | Black                                                                                                                                                |
| Construction                 | PC                                                                                                                                                   |
| Dimension (W x H x D)        | 10.28" x 6.50" x 2.96" (261mm x 165mm x 75mm)                                                                                                        |
| Gross Weight                 | 6.44 lb (2.92 Kg)                                                                                                                                    |
| Environmental                |                                                                                                                                                      |
| Operating Temperature        | 32°F ~ 104°F (0°C ~ 40°C)                                                                                                                            |
| Storage Temperature          | 14°F ~ 122°F (-10°C ~ 50°C)                                                                                                                          |
| ESD                          | Air charge: +/- 8KV<br>Contact charge: +/- 4KV                                                                                                       |
| Certifications and Standards | CE/FCC Class A                                                                                                                                       |
| Power Supply                 |                                                                                                                                                      |
| AC Adapter                   | AC 100V ~ 240V, 47Hz ~ 63Hz<br>Output: 19V/4.74A/90W                                                                                                 |
| DC Adaptor                   | —                                                                                                                                                    |



## Dimension

Unit: mm

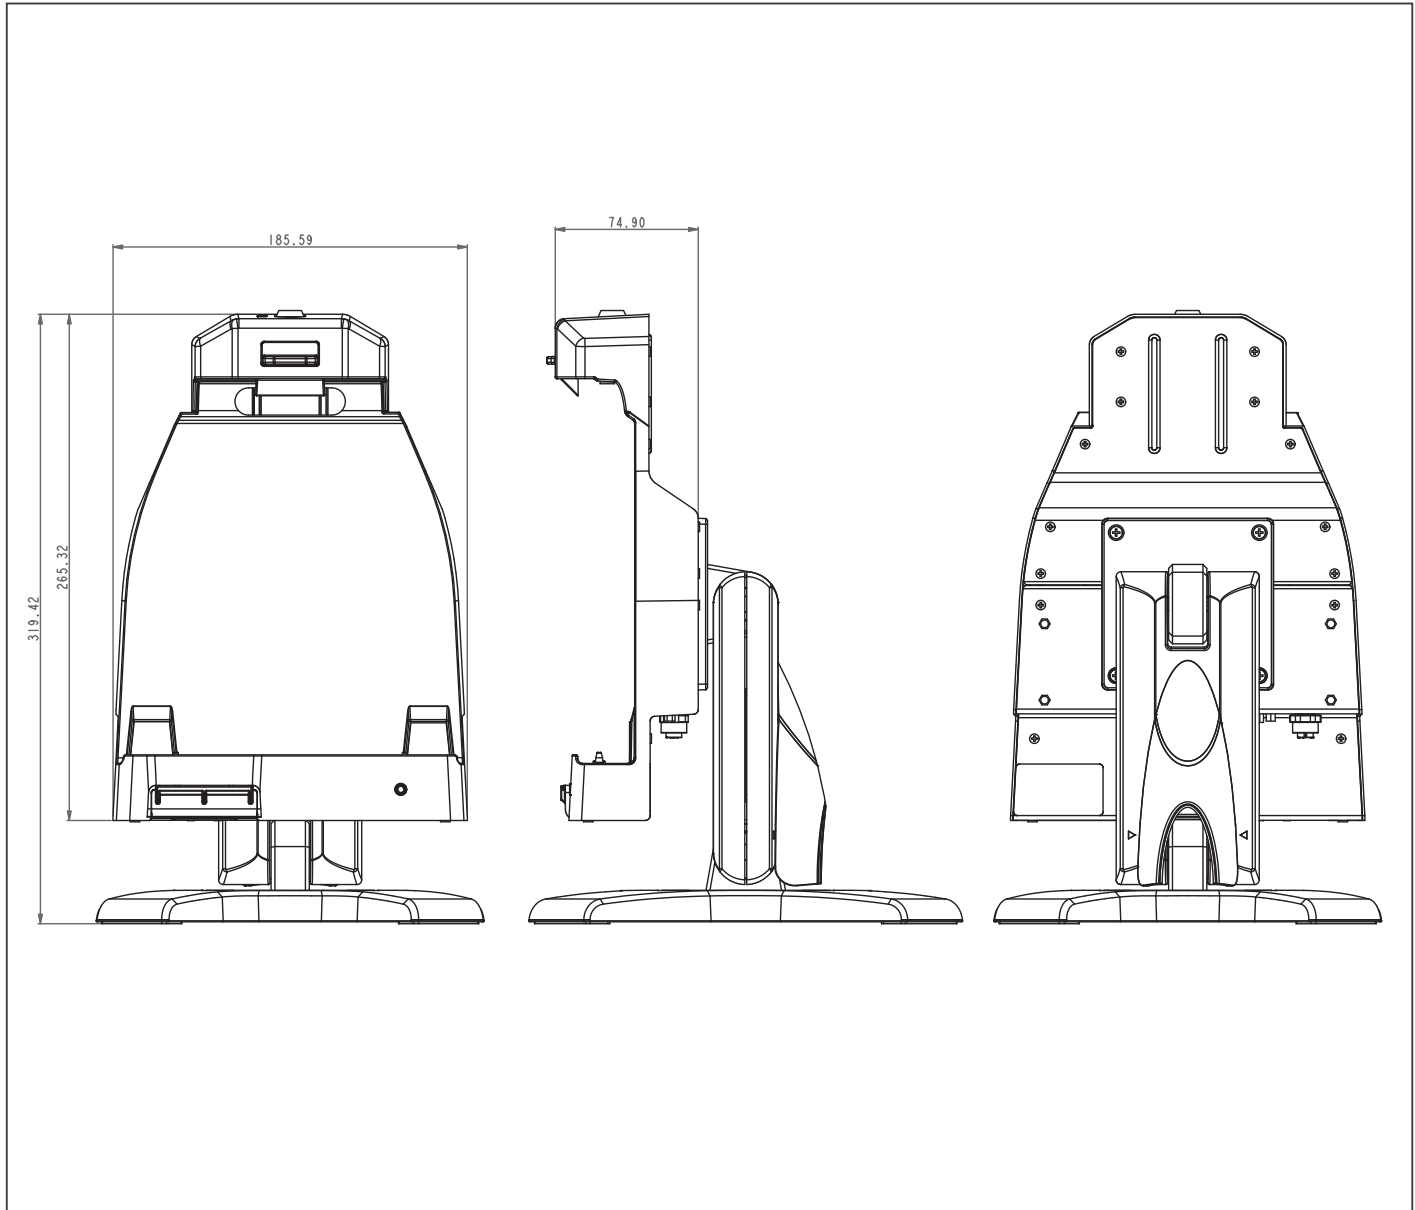

## Ordering Information

| Part Number   | Applied Models                | Stand | Expansion I/O                                                     |
|---------------|-------------------------------|-------|-------------------------------------------------------------------|
| RDS-241V-0000 | For RTC-1200 Series w/ Stand  | Yes   | USB 2.0 x 2, USB 3.2 Gen 1 x 2, RS-232 x 2, LAN x 1, DC Connector |
| RDS-241V-0001 | For RTC-1200 Series w/o Stand | No    | USB 2.0 x 2, USB 3.2 Gen 1 x 2, RS-232 x 2, LAN x 1, DC Connector |

## Packing List

- RDS-241V
  - 1255300908  
AC-To-DC Power Adaptor, 19V, 90W
- \*Power cord must be purchased separately.

## Optional Accessories

- 170X000674  
Power cord for USA
- 170X000675  
Power cord for Europe
- 170X000902  
Power Cord for UK
- 170X000901  
Power Cord for Japan