


EXB-RF01

EXB Module with RFID



- ◆ LEGO Mode Technology
- ◆ RFID Module


► Specifications

| Parameter               | Description                                   |
|-------------------------|-----------------------------------------------|
| Function                | RFID Function Board                           |
| Applicable Structure    | Compatible with L200, L300, and custom models |
| Compatible Motherboards | CES-1602, CES-1901, CES-1201                  |
| Reserved function       | /                                             |
| Power Supply            | 5V DC from Motherboard Pin                    |
| Power Consumption       | < 1W (typical)                                |
| Operating Temperature   | -10°C to +60°C                                |
| Storage Temperature     | -20°C to +70°C                                |
| Dimensions              | /                                             |
| Mounting Method         | Adhesive Mounting                             |

► Dimensions



► Image

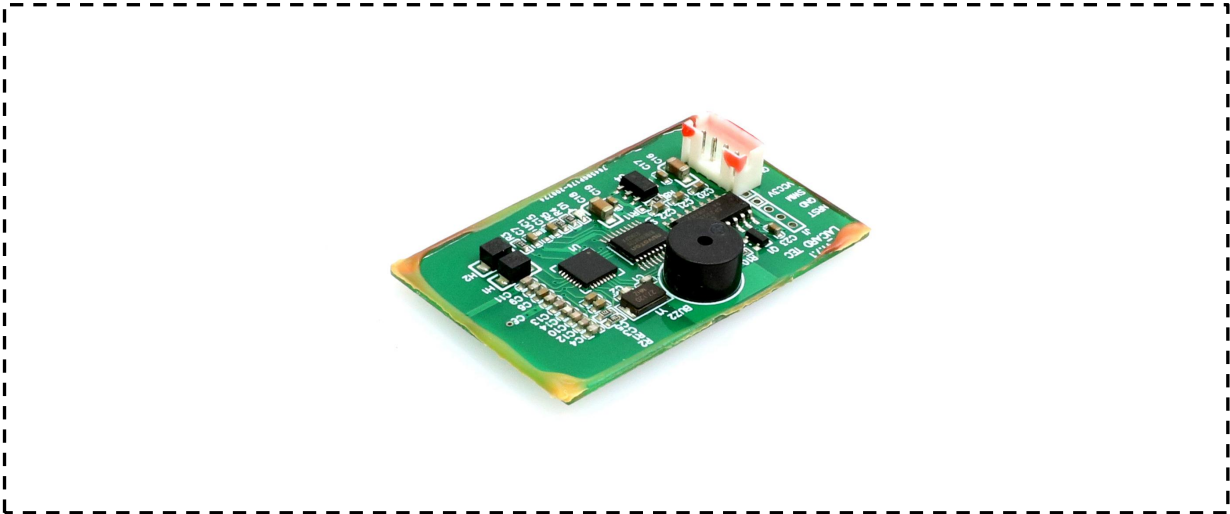

► Ordering Information

| Model    | Part Number  |
|----------|--------------|
| EXB-RF01 | C1.02.07.161 |

► Compatible List

| Model No.    | EXB-RF01 |
|--------------|----------|
| KLD-1062B(A) | V        |
| KLD-1062B(C) | V        |
| KLD-1562D(F) | V        |
| UTC-S1562C   | V        |
| UTC-W2172B   | V        |
|              |          |
|              |          |
|              |          |
|              |          |
|              |          |
|              |          |