

CV-117/P2102 Series

17" TFT-LCD Modular Panel PC with 8th Gen. Intel® Core™ U Series Processor



HIGH PERFORMANCE INDUSTRIAL PANEL PC

| CV-100/P2000 Series |

Overview

[CONTACT](#)

The CV-100/P2102 Series is a 12.1" - 24" TFT-LCD panel PC with Intel® 8th generation Core™ U Series Processor and is suitable for the high-performance requirement in factory and machine automation applications. The processor brings outstanding computing performance boost up to 84% at a TDP of 15 watts, compared to 6th generation Intel® Core™ U series. To enable faster responsiveness and deal with multi tasks with ease, the panel PC is equipped with two DDR4 2400 SODIMM sockets for up to 64 GB memory. With its slim design, the CV-100/P2102 Series offers extensive I/O to fulfill different connectivities and can easily fit into almost any space limited environment. For wireless connectivity, the CV-100/P2102 Series has 1x M.2 2230 E key and 2x full-size Mini-PCle expansions which can be installed various add-on cards to enable Wi-Fi, 3G, and LTE communication. Besides, the CV-100/P2102 Series supports Control Function Module (CFM) Technology to install optional CFM modules for increasing power over ethernet and power ignition sensing functions according to user's specific applications. Featuring rigorous industrial protections, wide range operating temperature, IP65 dust/waterproof front panel, and wide range DC power input (9 to 48VDC), the CV-100/P2102 Series is appropriate for harsh environments and critical industrial applications. Furthermore, the CV-100/P2102 Series supports Cincoze patented Convertible Display System (CDS) technology, allowing users to replace display module or computer module on-site easily and thereby reducing maintenance costs and downtime.

Key Features


- 17" 1280 x 1024 (SXGA) TFT-LCD with Resistive 5-wire Touch / Projected Capacitive Touch
- Onboard 8th Generation Intel® Core™ U Series Processor
- 2x DDR4 SO-DIMM Socket, Supports Up to 2400MHz, 64GB
- Supports Triple Independent Display
- Integrated USB 3.2 Gen 2 supports up to 10Gbps
- M.2 E Key Socket for Wireless Module or Intel CRF Module
- Supports Ignition Sensing Function (IGN) (with optional CFM module)
- Supports 2x PoE+ Function (with optional CFM module)
- Designed with Rugged Aluminum Die-casting Front Bezel
- True Flat IP65 Compliant Front Panel Protection
- Supports Panel / VESA / Rack Mounting

Certifications



High Performance Per Watt

Powered by 8th generation Intel® Core™ U series processor (up to 4 cores, 4.10 GHz) at a TDP of only 15W, the CV-100/P2102 can fulfill a variety of applications that require high-performance computing and low power budget simultaneously.



4X Cores

**Thickness
60.5 mm**



Slim Design with Multiple Functions

The CV-100/P2102 is designed at only 60.5 mm height and provides a wall-mount kit for easy installation in any space limited environment. Furthermore, a variety of I/O, 2x 2.5" SATA 3.0 drive bays, and M.2/mPCIe expansions are also available to fulfill multiple applications.

Patented CDS Technology

Thanks to Cincoze patented Convertible Display System (CDS) technology, the CV-100/P2102 not only makes maintenance easier but also provides upgradability whenever requested.



CV-117 Series Specifications

Model Name	CV-117R		CV-117C	CV-117G
Display				
LCD Size	▪ 17" (5:4)			
Max. Resolution	▪ 1280 x 1024			
Brightness (cd/m2)	▪ 350			
Contrast Ratio	▪ 800 : 1			
LCD Color	▪ 16.7M			
Pixel Pitch (mm)	▪ 0.264 (H) x 0.264 (V)			
Viewing Angle (H-V)	▪ 160 / 140			
Backlight LED Life Time	▪ 50,000 hrs (LED Backlight)			
Touch Screen				
Touch Type	▪ Resistive 5-wire	▪ Projected Capacitive	▪ Non-Touch (Glass Cover)	
Wet Touch Tracking		v		
Physical				
Dimension (W x D x H)	▪ 450 x 350 x 63.2mm			
Weight Information	▪ 5.64 kg			
Mechanical Construction	▪ Die-Casting Flat Surface			
Power				
Power Consumption	▪ 18.9W (Max.)	▪ 18.85W (Max.)	▪ 18.4W (Max.)	
Environment				
Front Panel Protection	▪ IP 65 Compliant			
Operating Temperature	▪ -20°C to 70°C (-4°F to 158°F) (With Industrial Grade peripherals; Ambient with air flow)			
Storage Temperature	▪ -30°C to 80°C (-22°F to 176°F)			
Relative Humidity	▪ 90% RH @ 40°C (Non-condensing)			
EMC	▪ CE, UKCA, FCC, ICES-003 Class A			
EMI	▪ CISPR 32 Conducted & Radiated: Class A ▪ EN/BS EN 55032 Conducted & Radiated: Class A ▪ EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A ▪ EN/BS EN61000-3-3 Voltage fluctuations & flicker ▪ FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A			
EMS	▪ EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV ▪ EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m ▪ EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV ▪ EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV ▪ EN/IEC 61000-4-6 CS: 3V ▪ EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m ▪ EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz			
Safety	▪ UL, cUL, CB, IEC, EN 62368-1			

P2102 Series Specifications


Model Name	P2102		P2102E
System			
Processor	- Onboard 8th Intel® Core™ U Processors (Whiskey Lake) - Intel® Core™ i5-8365UE Quad Core Processor (6M Cache, up to 4.10 GHz) - Intel® Core™ i3-8145UE Dual Core Processor (4M Cache, up to 3.90 GHz) - TDP: 15 W		
Memory	2x DDR4 2400 MHz 260-Pin SO-DIMM Socket - Support Un-buffered and Non-ECC Type up to 64 GB		
Graphics			
Graphics Engine	Integrated Intel® UHD Graphics 620		
Maximum Display Output	Supports Triple Independent Display		
CDS	1x CDS Connector for Cincoze Display Module		
VGA	1x VGA Connector(1920 x 1200 @60Hz)		
DP	1x DisplayPort Connector (4096 x 2304 @ 60Hz, According to CPU Specifications) * Verified maximum resolution: 3840 x2160 @ 60Hz		
Audio			
Audio Codec	Realtek® ALC888, High Definition Audio		
Line-out	1x Line-out, Phone Jack 3.5mm		
Mic-in	1x Mic-in, Phone Jack 3.5mm		
I/O			
LAN	2x GbE LAN (Supports WoL, Teaming, Jumbo Frame & PXE), RJ45 - GbE1: Intel® I219LM - GbE2: Intel® I210		
USB	3x USB 3.2 Gen2 (Type A), 2x USB 2.0 (Type A)		
Serial Port	4x RS-232/422/485 with Auto Flow Control Support 5V/12V, DB9		
DIO	16x Isolated Digital I/O (8in/8out), 20-Pin Terminal Block		
Storage			
SSD/HDD	2x 2.5” HDD/SSD Drive Bay (SATA 3.0), Supports RAID 0/1		
Expansion			
Mini PCI Express	2x Full-size Mini-PCIe Sockets		
PCI Express		1x PCI or 1x PCIe x4 Expansion slot with Optional Riser Card * Supports maximum dimensions of add-on card (H x L) : 111 x 169mm	
M.2 E Key Socket	1x M.2 2230 E Key Socket for Wireless Module, Supports Intel CRF Module		
SIM Socket	1x Front Accessible SIM Socket		
Universal Bracket		2x Universal I/O Bracket	
CFM (Control Function Module) Interface	2x CFM Interface for optional IGN or PoE Module Expansion		
CDS (Convertible Display System) Technology	1x Convertible Display System (CDS) Interface		

Other Function		
Clear CMOS Switch	▪ 1 x Clear CMOS Switch	
Instant Reboot	▪ Support 0.2sec Instant Reboot technology	
Watchdog Timer	▪ Software Programmable Supports 256 Levels System Reset	
Internal Speaker	▪ AMP 2W + 2W	
OSD Function	▪ LCD On/Off, Brightness Up, Brightness Down	
Reset Button	▪ 1x Reset Button	
Power		
Power Button	▪ 1x ATX Power On/Off Switch	
Power Mode Switch	▪ 1x AT/ATX Mode Switch	
Power Input	▪ 1x 3-pin Terminal Block Connector with Power Input 9~48VDC	
Power Adapter (Optional)	▪1x Optional AC/DC 12V/5A, 60W or 24V/5A 120W	
Remote Power On/Off	▪ 1x Remote Power On/Off Connector, 2-pin Terminal Block	
Physical		
Dimension(W x D x H)	▪ 254.5 x 190 x 41.5mm	▪ 254.5 x 190 x 61 mm
Weight Information	▪ 2.2 kg	▪ 2.7 kg
Mechanical Construction	▪ Extruded Aluminum with Heavy Duty Metal	
Mounting	▪ Wall / VESA / CDS / DIN Rail	
Physical Design	▪ Fanless Design ▪ Jumper-less Design	
Reliability & Protection		
Reverse Power Input	▪ Yes	
Over Voltage Protection	▪ Protection Range: 51~58V ▪ Protection Type: shut down operating voltage, re-power on at the present level to recover	
Over Current Protection	▪ 15A	
CMOS Battery Backup	▪ SuperCap Integrated for CMOS Battery Maintenance-free Operation	
MTBF	▪ 231,243 hours	
Operating System		
Microsoft® Windows®	▪ Windows®10	
Linux	▪ Supports by project	
Environment		
Operating Temperature	▪ Ambient with Air Flow: -40°C to 70°C (with Extended Temperature Peripherals)	
Storage Temperature	▪ -40°C to 70°C	
Relative humidity	▪ 95% RH @ 70°C (Non-condensing)	
Shock	▪ Operating, 50 Grms, Half-sine 11ms Duration (w/ SSD, according to IEC60068-2-27)	
Vibration	▪ Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)	▪ Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64) ▪ Operating, 1 Grms, 10-500 Hz, 3 Axes (w/ CV-W124 only, according to IEC60068-2-6)
EMC	▪ CE, UKCA, FCC, ICES-003 Class A	


EMI	• CISPR 32 Conducted & Radiated: Class A • EN/BS EN 55032 Conducted & Radiated: Class A • EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A • EN/BS EN61000-3-3 Voltage fluctuations & flicker • FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	• EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV • EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m • EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV • EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV • EN/IEC 61000-4-6 CS: 3V • EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m • EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz
Safety	• UL, cUL, CB, IEC, EN62368-1
Fire Protection	• EN 45545-2

CV-117/P2102 External Layout


Front I/O

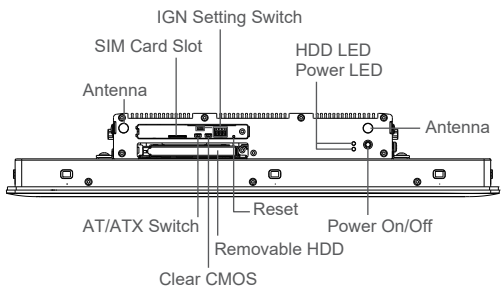


Rear I/O

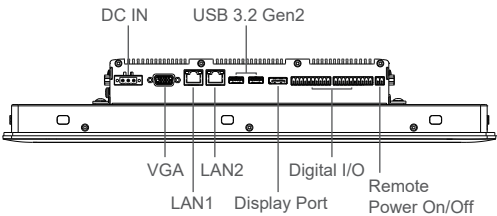

Left I/O

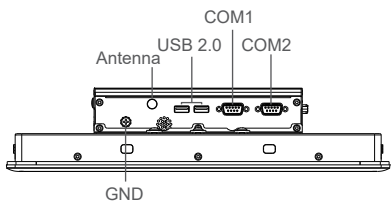


Right I/O

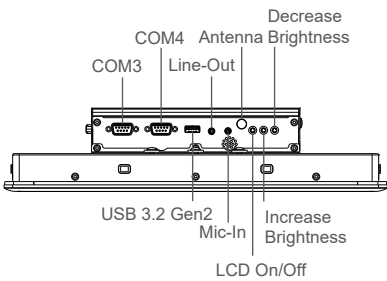


CV-117/P2102E External Layout


Front I/O

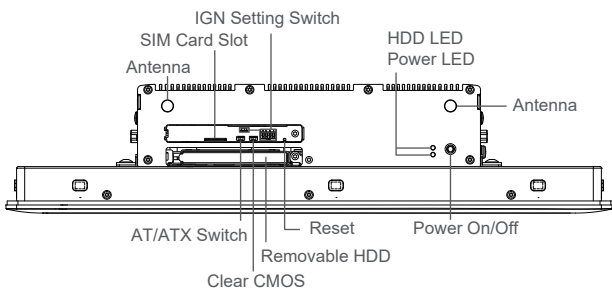


Rear I/O

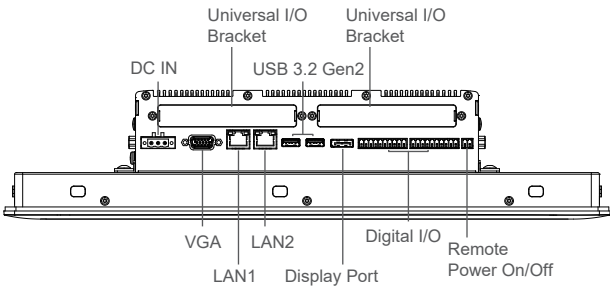



Left I/O

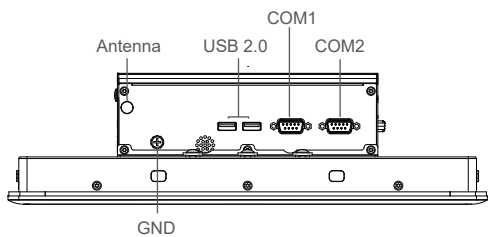



Right I/O

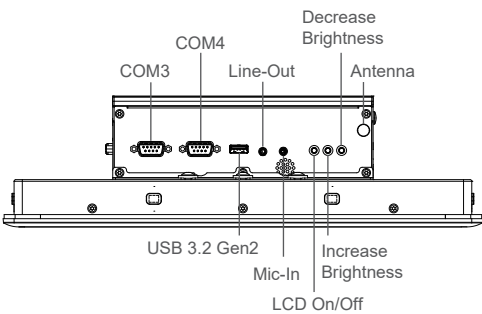

CV-117/P2102 Dimensions

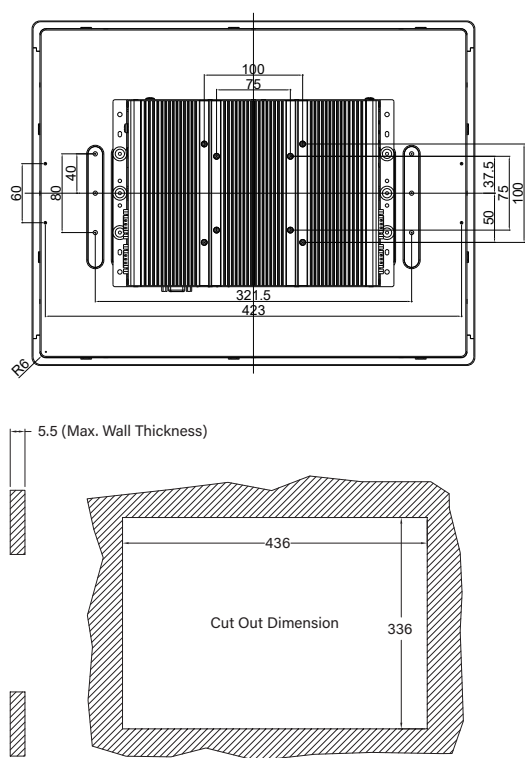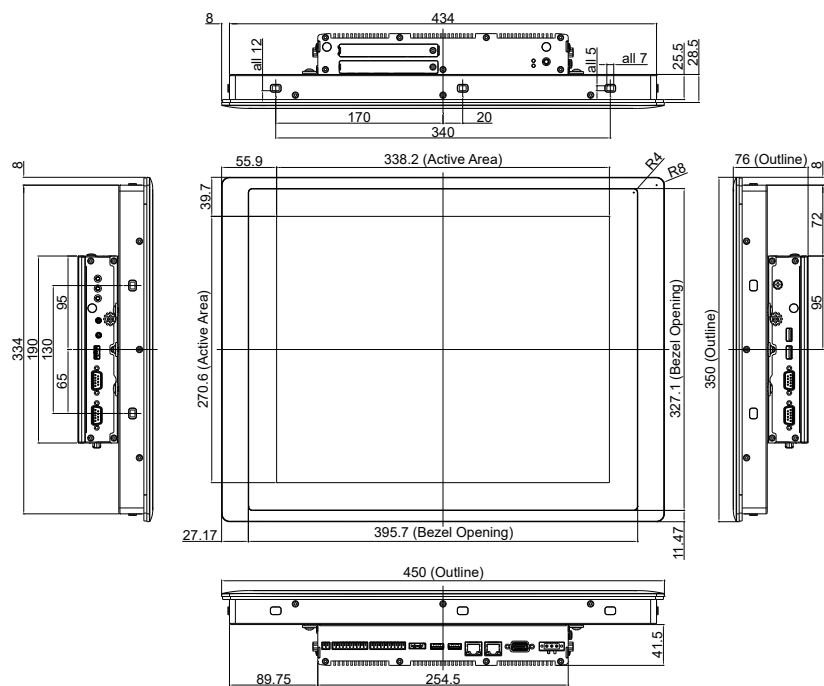

CV-117/P2102E Dimensions

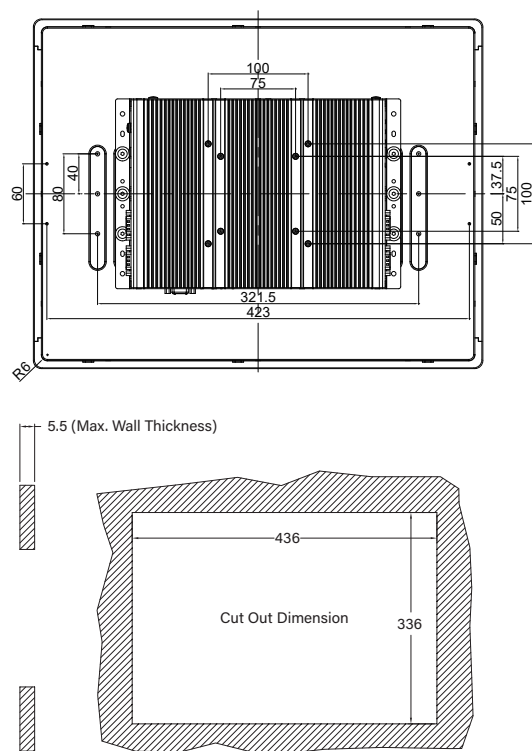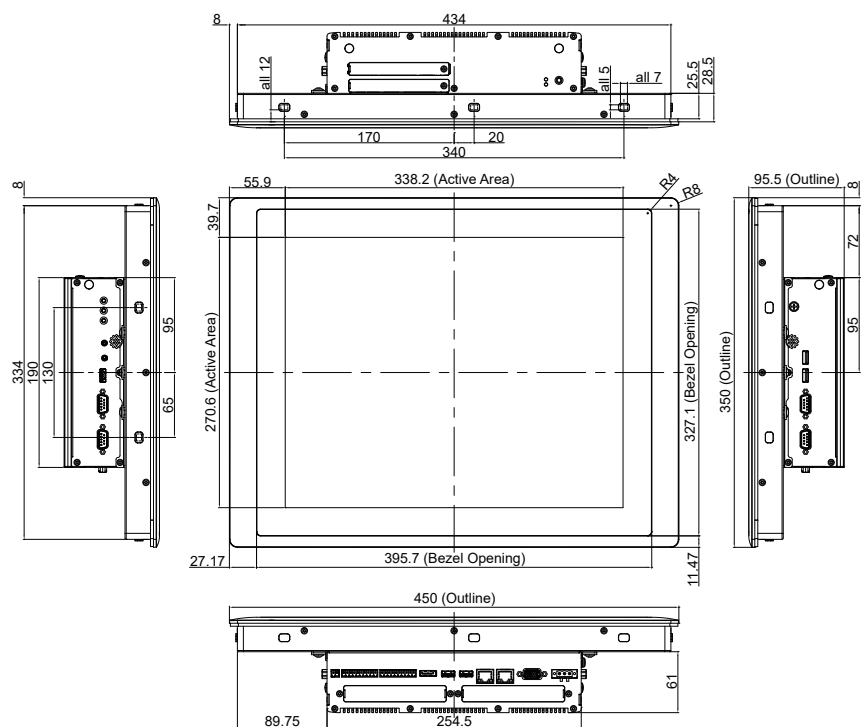

Ordering Information

Available Models

Model No.	Description
CV-117R-R10/P2102-i5-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and Resistive Touch
CV-117R-R10/P2102E-i5-R10	17" SXGA TFT-LCD Modular and Expandable Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and Resistive Touch
CV-117C-R11/P2102-i5-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and P-Cap. Touch
CV-117C-R11/P2102E-i5-R10	17" SXGA TFT-LCD Modular and Expandable Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and P-Cap. Touch
CV-117G-R10/P2102-i5-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and Glass Only
CV-117G-R10/P2102E-i5-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and Glass Only
CV-117R-R10/P2102-i3-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and Resistive Touch
CV-117R-R10/P2102E-i3-R10	17" SXGA TFT-LCD Modular and Expandable Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and Resistive Touch
CV-117C-R11/P2102-i3-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and P-Cap. Touch
CV-117C-R11/P2102E-i3-R10	17" SXGA TFT-LCD Modular and Expandable Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and P-Cap. Touch
CV-117G-R10/P2102-i3-R10	17" SXGA TFT-LCD Modular Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and Glass Only
CV-117G-R10/P2102E-i3-R10	17" SXGA TFT-LCD Modular and Expandable Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and Glass Only

Model Configuration

	CV-117R	CV-117C	CV-117G	P2102(i3/i5)	P2102E(i3/i5)
CV-117R/P2102	V	--	--	V	--
CV-117C/P2102	--	V	--	V	--
CV-117G/P2102	--	--	V	V	--
CV-117R/P2102E	V	--	--	--	V
CV-117C/P2102E	--	V	--	--	V
CV-117G/P2102E	--	--	V	--	V

V : Compatible


Package Checklist

• CV-117/P2102 Series Panel PC x 1	• Power Terminal Block Connector (Female) x 1
• Panel Mounting Kit x 1	• Screw Pack x 5
• DIO Terminal Block Connector (Female) x 2	• Remote Power On/Off Terminal Block Connector x 1
• PCI / PCIe Card Installation Kit x 1(For P2102E only)	• Thermal Pad (for CPU Thermal Block) x 1

Optional Modules and Accessories

Model No.	Description
MEC-COM-M212-DB9	Mini-PCIe Module with 2x RS-232 Serial Ports, 1x Standard DB9 Cable (For P2102E Only)
MEC-COM-M334-TDB9	Mini-PCIe Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable (For P2102E Only)
MEC-LAN-M102-30	Mini-PCIe Module with 2x LAN Ports, 2x 30cm (For P2102E Only)
MEC-USB-M102-30	Mini-PCIe Module with 2x USB 3.2 Gen1 Ports (For P2102E Only)
CFM-IGN101	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable
CFM-PoE04	PoE Control Function Module, Individual Port 25.5W (For P2102 only)
CFM-PoE05	PoE Control Function Module, Individual Port 25.5W (For P2102E only)
MEC-COM-M212-DB9	Mini-PCIe Module with 2x RS-232 Serial Ports, 1x Standard DB9 Cable (For P2102E Only)
MEC-COM-M334-TDB9	Mini-PCIe Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable (For P2102E Only)
MEC-LAN-M102-30	Mini-PCIe Module with 2x LAN Ports, 2x 30cm (For P2102E Only)
MEC-USB-M102-30	Mini-PCIe Module with 2x USB 3.2 Gen1 Ports (For P2102E Only)
CFM-IGN101	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable
CFM-PoE04	PoE Control Function Module, Individual Port 25.5W (For P2102 only)
CFM-PoE05	PoE Control Function Module, Individual Port 25.5W (For P2102E only)
RC-E4-02	Riser Card with 1x PCIe4 Slot (For P2102E only)
RC-PI-02	Riser Card with 1x PCI Slot (For P2102E only)
UB1203	Universal Bracket with 2x DB9 Cutout (For P2102E only)
UB1211	Universal Bracket with 2x RJ45 Cutout (For P2102E only)
UB1214	Universal Bracket with 2x USB Cutout (For P2102E only)
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor
GST120A24-CIN	Adapter AC/DC 24V 5A 120W, GST120A24-CIN, wide temp(-30°C ~ +70°C), level VI
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)
SL2-SL3	US 2 heads power cord, US B type to IEC C13,SVT 18AWG/3C Black 1.8M
SL6-SL3	EU 2 heads power cord, EU G type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M
QP026-SL3	UK 2 heads power cord, UK I type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M

Optional Module Configuration (For P2102E only)

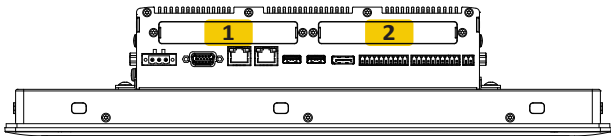

Model No.	Description	1	2
MEC-COM-M212-TDB9/UB1203 	Mini-PCle Module with 2x COM Ports, 1x Standard DB9 Cable, 2x Universal Bracket each with 1x DB9 Cutout	V	V
MEC-COM-M334-TDB9/UB1203 	Mini-PCle Module with 4x RS-232/422/485 Serial Ports	V	V
MEC-LAN-M102-30/UB1211 	Mini-PCle Module with 2x LAN Ports, 2x 30cm cable, w/ 1x Universal Bracket with 2x RJ45 Cutout	V	V
MEC-USB-M102-30/UB1214 	Mini-PCle Module with 2x USB 3.2 Gen1 Ports, 1x 30cm cable, 1x Universal Bracket with 2x USB Cutout	V	V

V : Compatible