


DI-1200

12th Generation Intel Core i7/i5/i3 High Performance, Compact and Modular Rugged Embedded Computer

HIGH PERFORMANCE • POWER-SAVING

DI-1200 | Intel Alder Lake-P Compact Rugged Computer



Overview

[CONTACT](#)

The DI-1200, with a 12th generation Intel® Core™ U-series (Alder Lake-P Platform) processor, provides outstanding performance and boasts a low power consumption of 15W. The compact DI-1200 offers rich I/O interfaces and expansion options, meeting the requirements for high-performance, rugged embedded computers used in confined spaces. It suits for industrial automation, warehousing and logistics, transportation, environmental monitoring, and IoT applications.

Key Features

- Onboard 12th Intel® Alder Lake-P U-Series Core™ i7/i5/i3 Processors
- 1 x DDR5 SO-DIMM Sockets, Supports up to 4800MHz 32GB Memory
- Quad Independent Display (2x DP/HDMI®/CMI Display)
- 1x M.2 Key E Type 2230 Socket for Storage/Wireless/Bluetooth/Intel CNVi Module Expansion
- 1x M.2 Key B Type 3042/3052 Socket for 5G/Storage/GNSS/Add-on Card Expansion
- CMI Technology for Optional I/O Module Expansions
- CFM Technology for Power Ignition Sensing Function & PoE
- Wide Operating Temperature -40°C to 70°C
- Safety Standard: UL, cUL, CB, IEC, EN 62368-1

Certifications



High Performance & Power Saving

The DI-1200 supports the 12th generation Core™ i7/i5/i3 U-series (Alder Lake-P) processor based on the Intel® 7 process. Its exceptional processing performance and ultra-low power consumption of just 15W, make it highly suitable for mobile devices limited by battery capacity.

15 Watts

Low Power Consumption



Smaller than A5

The DI-1200 has a footprint smaller than a sheet of A5 paper, with dimensions of only 203 x 142 x 66.8 mm. It is ideal for mobile devices such as AGVs and AMRs, tight spaces in vehicles, or small cabinets in factories.

High-speed I/O

The DI-1200 offers a range of high-speed I/O, including LAN (10GbE, 2.5GbE, 1GbE), USB 3.2 (10Gbps, 5Gbps), USB 2.0, and more, making data and image transmission faster and allowing easy connection to various high-speed devices.






Comprehensive Wireless Options

The DI-1200 has one M.2 Key E slot and one M.2 Key B slot, supporting a full range of wireless transmission options, including GSM, GNSS, Wi-Fi, and Bluetooth. It also supports the Intel CNVi module, meeting diverse transmission needs.

Quick Hard Drive Removal

Mobile devices must allow quick access to data. The DI-1200 features a hot-swappable 2.5-inch SATA HDD/SSD slot in the front panel of the chassis, making it easy to remove the hard drive and access the data on it.

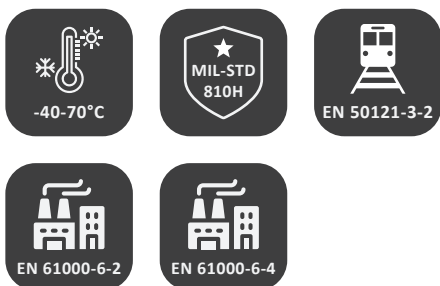

Secure & Rugged

The DI-1200 showcases its ruggedness and industrial-grade protections through multiple industry certifications. It complies with industrial EMC standards (IEC 61000-6-2 and IEC 61000-6-4), ensuring reliable operation in external electromagnetic interference from surrounding devices. The DI-1200 also meets the U.S. military standard, MIL-STD-810H, ensuring stable operation under extreme shock and vibration conditions.

Specifications

Model Name	DI-1200
System	
Processor	- Onboard 12th Intel® Alder Lake-P U-Series CPU: - Intel® Core™ i7-1265UE 10 Cores Up to 4.70 GHz, TDP 15W - Intel® Core™ i5-1245UE 10 Cores Up to 4.40 GHz, TDP 15W - Intel® Core™ i3-1215UE 6 Cores Up to 4.40 GHz, TDP 15W
Memory	1x DDR5 SO-DIMM Socket, Supports Un-buffered and non-ECC Type, Up to 32GB
BIOS	AMI BIOS
Graphics	
Graphics Engine	- Integrated Intel® Iris® Xe Graphics: Core™ i7-1265UE, i5-1245UE - Integrated Intel® UHD Graphics: Core™ i3-1215UE
Maximum Display Output	Supports Quad Independent Display
HDMI®	1x HDMI® Connector (3840 x 2160@60Hz)
DP	2x DisplayPort Connector (3840 x 2160@60Hz)
CMI Display	1x CMI Interface for Optional CMI-DP/CMI-HDMI®/CMI-VGA Module Expansion
Audio	
Audio Codec	Realtek® ALC888, High Definition Audio
Line-out	1x Line-out, Phone Jack 3.5mm
Mic-in	1x Mic-in, Phone Jack 3.5mm
I/O	
LAN	2x 2.5 GbE LAN, RJ45 - GbE1: Intel® I226 - GbE2: Intel® I226
COM	2x RS-232/422/485 with Auto Flow Control (Supports 5V/12V), DB9
USB	1 x USB 3.2 Gen2x1 (10Gbps), Type A 2 x USB 3.2 Gen1x1 (5Gbps), Type A 3 x USB 2.0 (480Mbps), Type A
Storage / Expansion	
2.5" Storage	1x 2.5" SATA HDD/SSD Bay (SATA 3.0)
M.2 Key B Socket	1x M.2 Key B Type 3042/3052 Socket (PCIe Gen 3x1 / USB3.2 Gen2 x1 / SATA), Support 5G/Storage/GNSS/Add-on Card Expansion * The maximum height of the M.2 Key B add-on card varies depending on the installed CMI module. Please refer to the manual for detailed information.
M.2 Key E Socket	1x M.2 Key E Type 2230 Socket (PCIe Gen 3x1 / USB2.0), Support Wireless/Bluetooth/Intel CNVi Module Expansion * The maximum height of the M.2 Key E add-on card is limited to 6.7mm.
SIM Socket	2 x Front Accessible SIM Socket
CMI (Combined Multiple I/O) Interface	1x CMI Interface for optional CMI-LAN Module Expansion 1x CMI Interface for optional CMI-Display / CMI-COM / CMI-DIO Module Expansion
CFM (Control Function Module) Interface	1x CFM IGN Interface for optional CFM-IGN Module Expansion


Other Function	
RAID	▪ Support RAID 0/1
External FAN Connector	▪ 1x External FAN Connector, 4-pin Terminal Block (Support Smart Fan by BIOS)
Clear CMOS Switch	▪ 1x Clear CMOS Switch
Reset Button	▪ 1x Reset Button
Watchdog Timer	▪ Software Programmable Supports 256 Levels System Reset
Power	
Power Button	▪ 1x ATX Power On/Off Button
Power Mode Switch	▪ 1x AT/ATX Mode Switch
Power Input	▪ 9 - 48VDC, 3-pin Terminal Block
Remote Power On/Off	▪ 1x Remote Power On/Off, 2-pin Terminal Block
Remote Power LED	▪ 1x Remote Power LED, 2-pin Terminal Block
Max. Power Consumption	▪ I7-1265UE: 104.74W - Test conducted with CPU, 1x RAM, and 1x storage - 100% load during burn-in testing
Inrush Current (Peak)	▪ I7-1265UE CPU: 4.963 A@24V
Physical	
Dimension (W x D x H)	▪ 203 x 142 x 66.8 mm
Weight Information	▪ 1.8 KG
Mechanical Construction	▪ Extruded Aluminum with Heavy Duty Metal
Mounting	▪ Wall / Side / DIN-RAIL / VESA Mount
Physical Design	▪ Fanless Design ▪ Cableless Design ▪ Jumper-less Design ▪ Unibody Design
Reliability & Protection	
Reverse Power Input	▪ Yes
Over Voltage Protection	▪ Protection Range: 51~58V ▪ Protection Type: shut down operating voltage, re-power on at the preset level to recover
Over Current Protection	▪ 15A
CMOS Battery Backup	▪ SuperCap Integrated for CMOS Battery Maintenance-free Operation
MTBF	▪ 486,235 Hours - Database: Telcordia SR-332 Issue3, Method 1, Case 3
Operating System	
Windows	▪ Windows®11, Windows®10
Linux	▪ Ubuntu Desktop 22.04 LTS

Environment	
Operating Temperature	-20°C to 70°C (-4°F to 158°F) - PassMark Burn-In Test: 100% CPU, 2D/3D Graphics (without thermal throttling) - With extended temperature peripherals; Ambient with air flow - According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	95%RH @ 70°C (non-Condensing)
Shock	MIL-STD-810H
Vibration	MIL-STD-810H
EMC	- CE, UKCA, FCC, ICES-003 Class A - EN IEC 61000-6-4 / EN IEC 61000-6-2 (24VDC Input Only) - EN 50155 (EN 50121-3-2 Only) - E-mark
EMI	- CISPR 32 Conducted & Radiated: Class A - EN/BS EN 50121-3-2 Conducted & Radiated: Class A - EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A - EN/BS EN 61000-3-3 Voltage fluctuations & flicker - FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	- EN/IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV - EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 20 V/m - EN/IEC 61000-4-4 EFT: AC Power: 2 kV; DC Power: 2 kV; Signal: 2 kV - EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV - EN/IEC 61000-4-6 CS: 10V (**Compliant with the standard when utilizing shielded cable.) - EN/IEC 61000-4-8 PFMF: 50 Hz, 30A/m - EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 1 cycles at 60 Hz
Safety	UL, cUL, CB, IEC, EN 62368-1


The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

External Layout

Front I/O

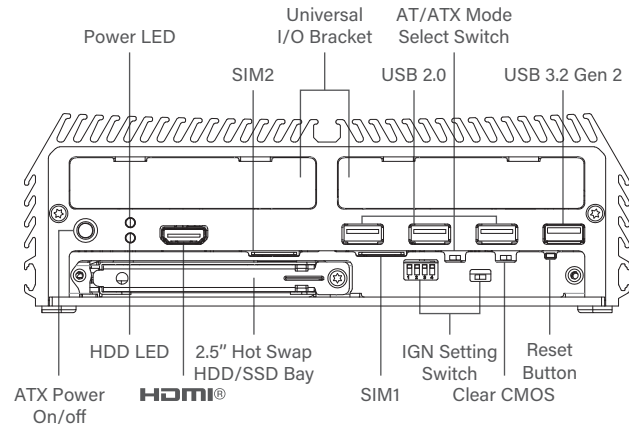


Rear I/O

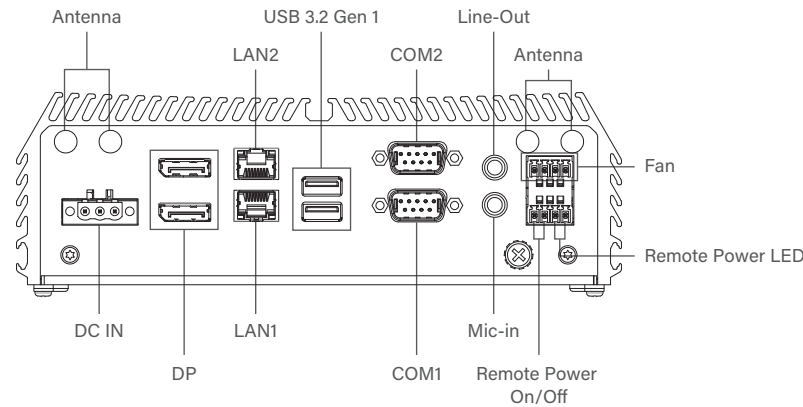

Dimensions

NOTE :
A:8-M4-VESA Hole_Screw L<3mm
B:2-M4 Din Rail Hole_Screw L<3mm
C:4-M4 Screw Hole
D:2- ϕ 4.5 Hole
E:4- ϕ 8* ϕ 4.5 Wall Mount Hole
F:4- ϕ 3.5 Plastic Din Rail Hole

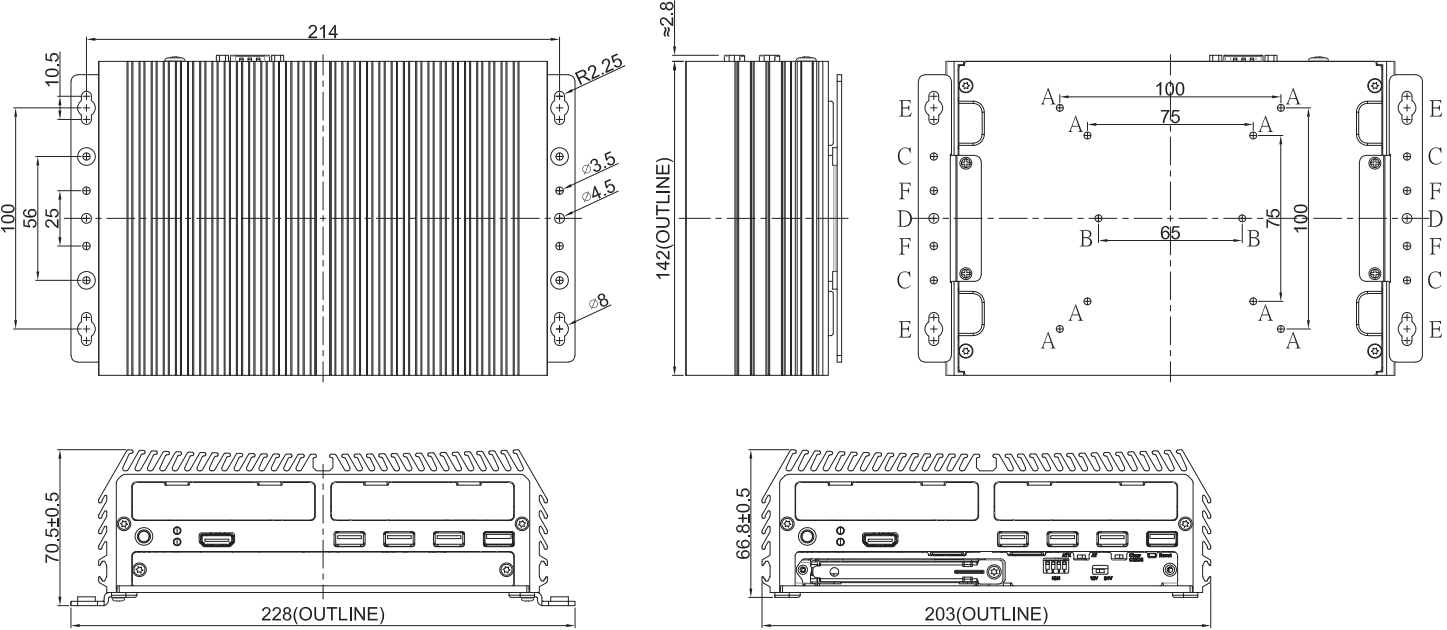

Ordering Information

Available Models

Model No.	Description
DI-1200-i7-R11	12th Generation Intel Core i7-1265UE High Performance, Compact and Modular Rugged Embedded Computer
DI-1200-i5-R11	12th Generation Intel Core i5-1245UE High Performance, Compact and Modular Rugged Embedded Computer
DI-1200-i3-R11	12th Generation Intel Core i3-1215UE High Performance, Compact and Modular Rugged Embedded Computer

Package Checklist


▪ DI-1200 Embedded Computer x1	▪ Power Terminal Block Connector x 1
▪ CPU Thermal Pad x1	▪ Remote Power On/Off + Remote Power LED Connector x 1
▪ Screw Pack x 1	▪ Fan Terminal Block Connector x 1
▪ Wall Mounting Kit x 1	▪ M.2 Key B Type 3052 to 3042 Adapter Bracket x 1


Optional Modules and Accessories

Model No.	Description
CFM-IGN102	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable
CFM-PoE06-R10	CFM Module with PoE Function, Individual Port 25.5W
CMI-LAN01-R12	CMI Module with 4x RJ45 Intel I210 GbE LAN Ports
CMI-M12LAN01-R12	CMI Module with 4 x M12 Intel I210 GbE LAN Ports
CMI-XM12LAN01-R10	CMI Module with M12 X-Coded Connector, 4x Intel I210 GbE LAN Ports
CMI-2P5GLAN01-R10	CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port
CMI-10GLAN04-R10	CMI Module with 2x Intel X550 10GbE LAN Ports
CMI-10GXM12LAN01-R10	CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector
CMI-CAN01-R10	CMI Module with 2x CAN FD Ports
CMI-VGA02-R10	CMI Module with 1x VGA Port
CMI-HD04-R10	CMI Module with 1x HDMI Port
CMI-DP02-R10	CMI Module with 1x DisplayPort
CMI-DIO05-R10	CMI Module with 16DIO (8in 8out)
CMI-COM05-R10	CMI Module with 2x RS232/422/485 (Support 5V/12V)
UB1503-R11	Universal Bracket with 2x DB9 Cutout
UB1506-R10	Universal Bracket with DisplayPort Cutout
UB1508-R10	Universal Bracket with HDMI Cutout
UB1510-R11	Universal Bracket with 4x M12 Cutout
UB1512-R11	Universal Bracket with 4x RJ45 Cutout for CMI-LAN Expansion
UB1516-R10	Universal Bracket with VGA Cutout
UB1518-R10	Universal Bracket with DIO Cutout

UB1528-R11	Universal Bracket with 2x RJ45 Cutout for CMI-10GLAN Expansion
UB1537-R10	Universal Bracket with 2x M12 X-coded Cutout
UB1538-R10	Universal Bracket with 2x DB9 and 1x Switch Cutout for CMI-CAN Expansion
DINRAIL-R10	Diamond series DIN-RAIL Mount Kit
FAN-EX103	External Fan with 4pin Terminal Block Plug and Mounting Bracket, Support Smart Fan (*External fan must be installed when using CFM-PoE module)
SIDE01	DI Series Side Mount Kit
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug and Tubes, Level VI
GST120A24-CIN	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug and Tubes, Level VI
GST220A24-CIN	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug and Tubes, Level VI
RSD-200D-24	Railway Single Output DC-DC Converter 200W / DC 24V

Optional Module Configuration

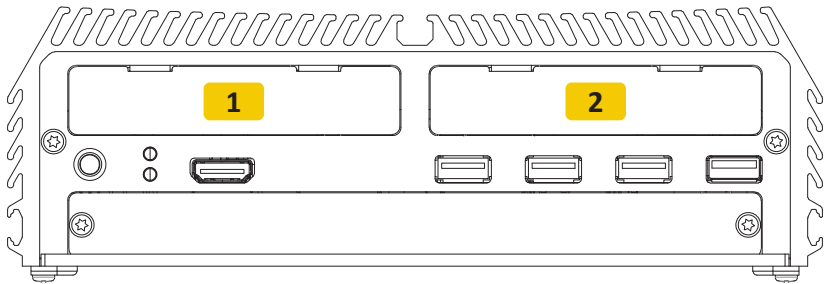

Model No.	Description	1	2
CMI-LAN01-R12/UB1512-R11 	CMI Module with 4x Intel I210 GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout for CMI-LAN Expansion	--	V
CMI-M12LAN01-R12/UB1510-R11 	CMI Module with M12 Connector, 4x Intel I210 GbE LAN Ports / Universal Bracket with 4x M12 Cutout	--	V
CMI-XM12LAN01-R10/UB1510-R11 	CMI Module with M12 X-Coded Connector, 4x Intel I210 GbE LAN Ports / Universal Bracket with 4x M12 Cutout	--	V
CMI-2P5GLAN01-R10/UB1512-R11 	CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout for CMI-LAN Expansion	--	V
CMI-10GLAN04-R10/UB1528-R11 	CMI Module with 2x Intel X550 10GbE LAN, RJ45 Port / 1x Universal Bracket with 2x RJ45 Cutout for CMI-10GLAN Expansion	--	V
CMI-10GXM12LAN01-R10/UB1537-R10 	CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector / Universal Bracket with 2x M12 X-coded Cutout	--	V
CMI-CAN01-R10/UB1538-R10 	CMI Module with 2x CAN FD Ports / Universal Bracket with 2x DB9 and 1x Switch Cutout for CMI-CAN Expansion	--	V
CMI-VGA02/UB1516-R10 	CMI Module with 1x VGA Port/Universal Bracket with VGA Cutout	V	--
CMI-HD04/UB1508-R10 	CMI Module with 1x HDMI Port/Universal Bracket with HDMI Cutout	V	--
CMI-DP02/UB1506-R10 	CMI Module with 1x DisplayPort/Universal Bracket with DisplayPort Cutout	V	--
CMI-COM05-R10/UB1503-R11 	CMI Module with 2x RS232/422/485 Ports (Support 5V/12V) / 1x Universal Bracket with 2x DB9 Cutout	V	--
CMI-DIO05-R10 / UB1518-R10 	CMI Module with 16DIO (8in 8out) / 1x Universal Bracket with DIO Cutout	V	--

V : Compatible