

DX-1200

BTL-S/14/13/12th Gen. Intel® Core Series High Performance and Compact Rugged Embedded Computer



MAX. PERFORMANCE | MIN. FOOTPRINT

DX-1200, BTL-S / 14 / 13 / 12th Gen. Intel Core Processor Rugged Embedded Computer

Overview

CONTACT

The DX-1200 is a fanless embedded computer that packs extreme performance into a rugged, compact chassis, making it the ideal choice for smart manufacturing, machine vision, and edge AI applications. BTL-S/14/13/12th gen Intel® Core™ (Bartlett Lake-S / Raptor Lake-S Refresh / Raptor Lake-S / Alder Lake-S) processor (TDP up to 65W) and DDR5 5600 MHz memory provide high-speed computing performance, while additional functions, including rich native I/O and modular expansion design, meet the requirements for a wide range of applications.

Key Features

- Intel® BTL-S/14/13/12th Gen. Bartlett Lake-S / Raptor Lake-S Refresh / Raptor Lake-S / Alder Lake-S Platform (max 65 W TDP)
- 2 x DDR5 SO-DIMM Sockets, Supports ECC/non ECC type Memory, Up to 5600MHZ, 96GB
- Quad Independent Display (HDMI / DP / DVI-I)
- 1x M.2 Key E Type 2230 Socket for Intel CNVi / Wireless Module
- CMI Technology for Optional I/O Module Expansions
- CFM Technology for Power Ignition Sensing & PoE Function
- Wide Operating Temperature -40°C to 70°C
- Safety Standard: UL, cUL, CB, IEC, EN 62368-1

Certifications




Rapid Processing and Inference

The DX-1200 supports Intel® BTL-S/i4/13/12th gen (Bartlett Lake-S/Raptor Lake-S Refresh/Raptor Lake-S/Alder Lake-S) processors based on the Intel 7 process, with up to 24 cores (8P + 16E) and 32 threads, delivering more than 2.5x the speed of Comet Lake-S platform. The Intel® Xe architecture of the UHD 770 graphics chip boosts GPU image classification inference performance to 2.8x the speed of Comet Lake-S, providing the processing performance needed for AI and edge computing.

CPU Performance



GPU Image Classification Inference Performance



DDR5 ECC Memory

High-speed, Safe Memory

Two DDR5 SO-DIMM slots support up to 96GB of 5600MHz memory and include ECC (Error Correction Code) technology, giving the extra stability and reliability needed for industrial automation applications.

Rich and Diverse Expandability

To cater to the widest range of industrial applications, the DX-1200 provides one M.2 Key E slot and two Mini PCIe slots for the addition of WiFi, GNSS, 4G, and Bluetooth. The Mini PCIe slots also support I/O expansion cards, frame grabber cards, and more, to meet different application requirements.



High-speed, Reliable Data Transmission

To improve the transfer rate of videos or large files, the DX-1200 supports up to four high-speed 10Gbps LAN ports. And for application environments that require multiple network connections, the DX-1200 supports up to 8x PoE, providing data and power through the same cable to reduce the difficulty of wiring.

Robust and Reliable

The DX-1200 is built tough, reflected in its industrial-grade protection design and industry certifications in different fields. In addition to features such as wide temperature (-40 - 70°C), wide voltage input (9 - 48 VDC), overvoltage, overcurrent, and ESD protection, it also complies with the US military shock vibration standard MIL-STD-810G. Product safety and reliability are further ensured with internationally recognized UL 62368-1 safety certification. For more secure railway computing, it also passes the EMC EN 50121-3-2 standard in EN 50155 and the EN 45545-2 fire protection standard.



Specifications	
Model Name	DX-1200
System	
Processor	▪ Bartlett Lake-S Intel® Core Series 2 P-Core Only CPU - Intel Core™ Processor 9 273PE 12 Cores Up to 5.7 GHz, TDP 65 W - Intel Core™ Processor 7 253PE 10 Cores Up to 5.5 GHz, TDP 65 W - Intel Core™ Processor 5 223PE 8 Cores Up to 5.4 GHz, TDP 65 W - Intel Core™ Processor 5 213PE 8 Cores Up to 5.2 GHz, TDP 65 W - Intel Core™ Processor 3 201E 4 Cores Up to 4.8 GHz, TDP 60 W - Intel Core™ Processor 9 273PTE 12 Cores Up to 5.5 GHz, TDP 45 W - Intel Core™ Processor 7 253PTE 10 Cores Up to 5.4 GHz, TDP 45 W - Intel Core™ Processor 5 223PTE 8 Cores Up to 5.4 GHz, TDP 45 W - Intel Core™ Processor 5 213PTE 8 Cores Up to 5.2 GHz, TDP 45 W - Intel Core™ Processor 3 201TE 4 Cores Up to 4.6 GHz, TDP 45 W ▪ Bartlett Lake-S Intel® Core Series 2 Hybrid CPU - Intel Core™ Processor 7 251E 24 Cores Up to 5.6 GHz, TDP 65 W - Intel Core™ Processor 5 221E 14 Cores Up to 5.2 GHz, TDP 65 W - Intel Core™ Processor 5 211E 10 Cores Up to 4.9 GHz, TDP 65 W - Intel Core™ Processor 7 251TE 24 Cores Up to 5.4 GHz, TDP 45 W - Intel Core™ Processor 5 221TE 14 Cores Up to 5.0 GHz, TDP 45 W - Intel Core™ Processor 5 211TE 10 Cores Up to 4.8 GHz, TDP 45 W ▪ 14th Generation Intel® Raptor Lake-S Refresh Series P-Core Only CPU: - Intel® Core™ i9-14901E 8 Cores Up to 5.6 GHz, TDP 65W - Intel® Core™ i7-14701E 8 Cores Up to 5.4 GHz, TDP 65W - Intel® Core™ i5-14501E 6 Cores Up to 5.2 GHz, TDP 65W - Intel® Core™ i5-14401E 6 Cores Up to 4.7 GHz, TDP 65W - Intel® Core™ i3-14100 4 Cores Up to 4.7 GHz, TDP 60W - Intel® Core™ i9-14901TE 8 Cores Up to 5.5 GHz, TDP 45W - Intel® Core™ i7-14701TE 8 Cores Up to 5.2 GHz, TDP 45W - Intel® Core™ i5-14501TE 6 Cores Up to 5.1 GHz, TDP 45W - Intel® Core™ i5-14401TE 6 Cores Up to 4.5 GHz, TDP 45W - Intel® Core™ i3-14100T 4 Cores Up to 4.4 GHz, TDP 35W - Intel® Processor 300 2 Cores Up to 3.9 GHz, TDP 46W - Intel® Processor 300T 2 Cores Up to 3.4 GHz, TDP 35W ▪ 14th Generation Intel® Raptor Lake-S Refresh Series Hybrid CPU: - Intel® Core™ i9-14900 24 Cores Up to 5.8 GHz, TDP 65W - Intel® Core™ i7-14700 20 Cores Up to 5.4 GHz, TDP 65W - Intel® Core™ i5-14500 14 Cores Up to 5.0 GHz, TDP 65W - Intel® Core™ i5-14400 10 Cores Up to 4.7 GHz, TDP 65W - Intel® Core™ i9-14900T 24 Cores Up to 5.5 GHz, TDP 35W - Intel® Core™ i7-14700T 20 Cores Up to 5.2 GHz, TDP 35W - Intel® Core™ i5-14500T 14 Cores Up to 4.8 GHz, TDP 35W - Intel® Core™ i5-14400T 10 Cores Up to 4.5 GHz, TDP 35W ▪ 13th Generation Intel® Raptor Lake-S Series P-Core Only CPU: - Intel® Core™ i3-13100E 4 Cores Up to 4.4 GHz, TDP 60W - Intel® Core™ i3-13100 4 Cores Up to 4.5 GHz, TDP 60W - Intel® Core™ i3-13100TE 4 Cores Up to 4.1 GHz, TDP 35W - Intel® Core™ i3-13100T 4 Cores Up to 4.2 GHz, TDP 35W ▪ 13th Generation Intel® Raptor Lake-S Series Hybrid CPU: - Intel® Core™ i9-13900E 24 Cores Up to 5.2 GHz, TDP 65W - Intel® Core™ i9-13900 24 Cores Up to 5.6 GHz, TDP 65W - Intel® Core™ i7-13700E 16 Cores Up to 5.1 GHz, TDP 65W - Intel® Core™ i7-13700 16 Cores Up to 5.2 GHz, TDP 65W - Intel® Core™ i5-13500E 14 Cores Up to 4.6 GHz, TDP 65W - Intel® Core™ i5-13400E 10 Cores Up to 4.6 GHz, TDP 65W - Intel® Core™ i5-13500 14 Cores Up to 4.8 GHz, TDP 65W - Intel® Core™ i5-13400 10 Cores Up to 4.6 GHz, TDP 65W - Intel® Core™ i9-13900TE 24 Cores Up to 5.0 GHz, TDP 35W - Intel® Core™ i7-13700TE 16 Cores Up to 4.8 GHz, TDP 35W - Intel® Core™ i7-13700T 16 Cores Up to 4.9 GHz, TDP 35W - Intel® Core™ i5-13500TE 14 Cores Up to 4.5 GHz, TDP 35W - Intel® Core™ i5-13500T 14 Cores Up to 4.6 GHz, TDP 35W


	• 12th Generation Intel® Alder Lake-S Series P-Core Only CPU: - Intel® Core™ i5-12500E 6 Cores Up to 4.5 GHz, TDP 65W - Intel® Core™ i5-12500 6 Cores Up to 4.6 GHz, TDP 65W - Intel® Core™ i5-12400 6 Cores Up to 4.4 GHz, TDP 65W - Intel® Core™ i3-12100E 4 Cores Up to 4.2 GHz, TDP 60W - Intel® Core™ i3-12100 4 Cores Up to 4.3 GHz, TDP 60W - Intel® Core™ i5-12500TE 6 Cores Up to 4.3 GHz, TDP 35W - Intel® Core™ i3-12100TE 4 Cores Up to 4.0 GHz, TDP 35W - Intel® Pentium® G7400E 2 Cores Up to 3.6 GHz, TDP 46W - Intel® Pentium® G7400TE 2 Cores Up to 3.0 GHz, TDP 35W - Intel® Celeron® G6900E 2 Cores Up to 3.0 GHz, TDP 46W - Intel® Celeron® G6900TE 2 Cores Up to 2.4 GHz, TDP 35W - Intel® Pentium® G7400 2 Cores Up to 3.7 GHz, TDP 46W - Intel® Pentium® G7400T 2 Cores Up to 3.1 GHz, TDP 35W - Intel® Celeron® G6900 2 Cores Up to 3.4 GHz, TDP 46W - Intel® Celeron® G6900T 2 Cores Up to 2.8 GHz, TDP 35W • 12th Generation Intel® Alder Lake-S Series Hybrid CPU: - Intel® Core™ i9-12900E 16 Cores Up to 5 GHz, TDP 65W - Intel® Core™ i9-12900 16 Cores Up to 5.1 GHz, TDP 65W - Intel® Core™ i7-12700E 12 Cores Up to 4.8 GHz, TDP 65W - Intel® Core™ i7-12700 12 Cores Up to 4.9 GHz, TDP 65W - Intel® Core™ i9-12900TE 16 Cores Up to 4.8 GHz, TDP 35W - Intel® Core™ i7-12700TE 12 Cores Up to 4.7 GHz, TDP 35W
Chipset	• Intel R680E Chipset
Memory	• 2x DDR5 SO-DIMM sockets, support Un-buffered and ECC Type memory, up to 96GB. - Core™ i9/i7: Support 5600/4800 MHz with Single Rank memory and 5200/4800 MHz with Dual Rank memory. - Core™ i5/i3/Pentium®/Celeron®/Intel® Processor: Support 4800 MHz.
BIOS	• AMI BIOS
Graphics	
Graphics Engine	• Integrated Intel® UHD Graphics 770: Core™ i9/i7/i5 • Integrated Intel® UHD Graphics 730: Core™ i3 • Integrated Intel® UHD Graphics 710: Pentium®/Celeron®
Maximum Display Output	• Supports Quad Independent Display
DVI	• 1x DVI-I Connector - VGA: 1920 x 1080 @ 60 Hz - DVI-D: 1920 x 1200 @ 60 Hz
DP	• 1x DP Connector: 4096 x 2304 @ 60Hz * Verified maximum resolution: 3840 x 2160 @ 60Hz
HDMI	• 1x HDMI Connector: 3840 x 2160 @ 30Hz
Audio	
Audio Codec	• Realtek® ALC888, High Definition Audio
Line-out	• 1x Line-out, Phone Jack 3.5mm
Mic-in	• 1x Mic-in, Phone Jack 3.5mm
I/O	
LAN	• 2x 1GbE LAN, RJ45(Supports Wake on LAN, PXE) - GbE1: Intel® I219 - GbE2: Intel® I210
COM	• 4x RS-232/422/485 with Auto Flow Control (Supports 5V/12V), DB9
USB	• 4 x USB 3.2 Gen2x1 (10Gbps), Type A • 4 x USB 3.2 Gen1x1 (5Gbps), Type A
Storage	
SSD/HDD	• 2x 2.5" SATA HDD/SSD Bay Supporting Hot Swap Function (SATA 3.0)
mSATA	• 2x mSATA Socket (SATA 3.0, shared by Mini-PCIe socket)
RAID	• Support RAID 0/1/5/10

Expansion	
Mini PCI Express	1x Full-size Mini PCIe Socket (mPCIe / USB 2.0 / mSATA), Support Storage/Add-on Card Expansion 1x Full-size Mini PCIe Socket (mPCIe / USB 3.2 / mSATA), Support 5G/GNSS/Storage/Add-on Card Expansion
M.2 E Key Socket	1x M.2 Key E Type 2230 Socket, Support Intel CNVi Module
SIM Socket	1x SIM Socket
CMI (Combined Multiple I/O) Interface	2x High Speed CMI Interface for optional CMI Module Expansion 1x Low Speed CMI Interface for optional CMI Module Expansion
CFM (Control Function Module) Interface	1x CFM IGN Interface for optional CFM-IGN Module Expansion
Other Function	
External FAN Connector	1x External FAN Connector, 4-pin Terminal Block (Support Smart Fan by BIOS)
Clear CMOS Switch	1x Clear CMOS Switch
Reset Button	1x Reset Button
Instant Reboot	Support 0.2sec Instant Reboot Technology
Watchdog Timer	Software Programmable Supports 256 Levels System Reset
Power	
Power Button	1x ATX Power On/Off Button
Power Mode Switch	1x AT/ATX Mode Switch
Power Input	9-48VDC, 3-pin Terminal Block
Remote Power On/Off	1x Remote Power On/Off, 2-pin Terminal Block
Max. Power Consumption	35WCPU: 201.17W 65WCPU: 274.80W - Test conducted with CPU, 1x RAM, and 1x storage - 100% load during burn-in testing
Inrush Current (Peak)	35W CPU: 4.151 A@24V 65W CPU: 4.360 A@24V
Physical	
Dimension (W x D x H)	242 x 173 x 75 mm
Weight Information	3.05 kg
Mechanical Construction	Extruded Aluminum with Heavy Duty Metal
Mounting	Wall / DIN-RAIL / VESA / Side Mount
Physical Design	- Fanless Design - Cableless Design - Jumper-less Design - Unibody Design
Reliability & Protection	
Reverse Power Input Protection	Yes
Over Voltage Protection	- Protection Range: 51~58V - Protection Type: shut down operating voltage, re-power on at the preset level to recover
Over Current Protection	15A
CMOS Battery Backup	SuperCap Integrated for CMOS Battery Maintenance-free Operation
MTBF	394,488 Hours - Database: Telcordia SR-332 Issue3, Method 1, Case 3


Operating System	
Windows	Windows®11, Windows® 10
Linux	Ubuntu Desktop 22.04 LTS
Environment	
Operating Temperature	35W TDP Processor: -40°C to 70°C (-40°F to 158°F) 45W TDP Processor: -40°C to 60°C (-40°F to 140°F) (With External Fan Kit) 65W TDP Processor: -40°C to 50°C (-40°F to 122°F) (With External Fan Kit) - With extended temperature peripherals; Ambient with air flow - According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	95% RH @ 70°C (Non-condensing)
Shock	MIL-STD-810G
Vibration	MIL-STD-810G
EMC	CE, UKCA, FCC, ICES-003 Class A
EMI	- CISPR 32 Conducted & Radiated: Class A - EN/BS EN 50121-3-2 Conducted & Radiated: Class A - EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A - EN/BS EN61000-3-3 Voltage fluctuations & flicker - FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A
EMS	- EN/IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV - EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 20 V/m - EN/IEC 61000-4-4 EFT (with optional PPM module): AC Power: 2 kV; DC Power: 1 kV; Signal: 2 kV - EN/IEC 61000-4-5 Surges: AC Power: 2 kV - EN/IEC 61000-4-6 CS: 10V - EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m - EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz
Safety	UL, cUL, CB, IEC, EN 62368-1
Railway	- EMC: - EN 50155: 2021 Clause 4.4.6, 13.4.9 - EN 50121-1 : 2017 - EN 50121-3-2: 2016 + A1: 2019 - Simulated Long Life Test: - EN 50155: 2021 Clause 13.4.10.2 - EN/IEC 61373: 2010 Clause 9, Category 1 Class B Body mounted - Vibration: - EN 50155: 2021 Clause 13.4.10.4 - EN/IEC 61373: 2010 Clause 8, Category 1 Class B Body mounted - Shock: - EN 50155: 2021 Clause 13.4.10.3 - EN/IEC 61373: 2010 Clause 10, Category 1 Class A and Class B Body mounted
Fire Protection	EN 45545-2
In-Vehicle	E-Mark

External Layout


Front I/O

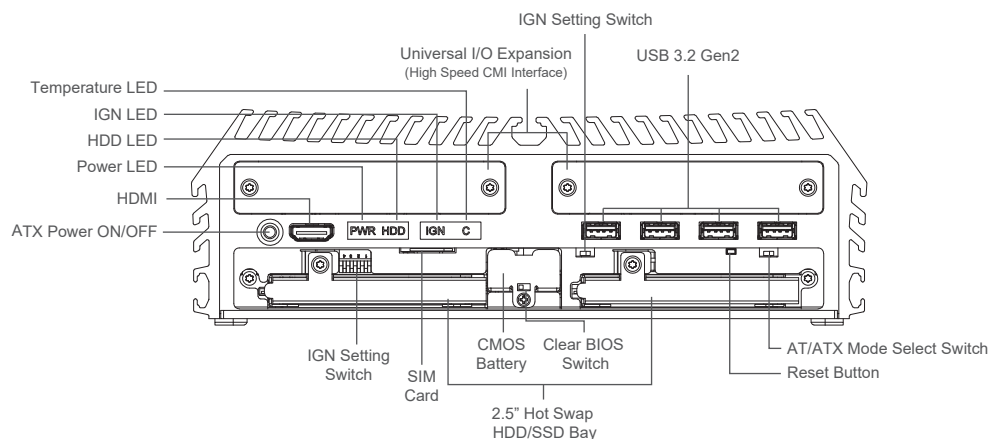

Rear I/O

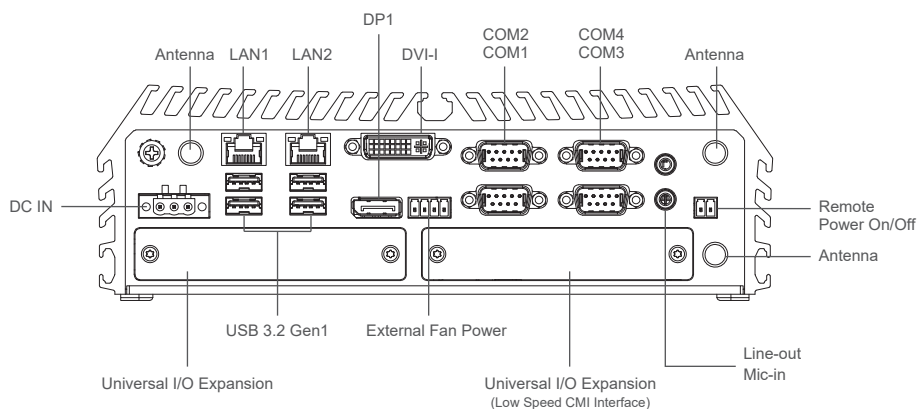

Dimensions

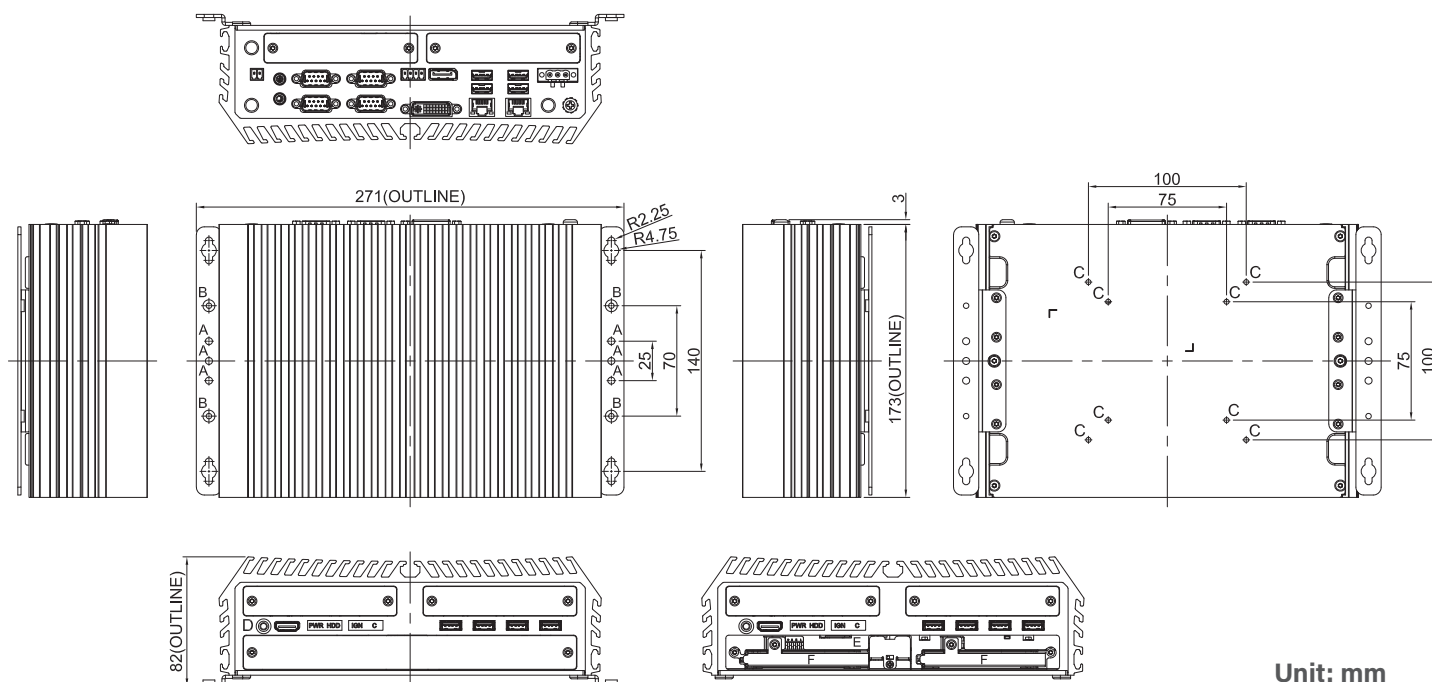

Unit: mm

Ordering Information

Available Models

Model No.	Description
DX-1200-R10	BTL-S/14/13/12th Gen. Intel® Core Series High Performance and Compact Rugged Embedded Computer

Package Checklist


• DX-1200 Rugged Computer x1	• Power Terminal Block Connector x1
• CPU Heatsink Pack x1	• Remote Power On/Off Terminal Block Connector x 1
• Screw Pack x 1	• Fan Terminal Block Connector x 1
• Wall Mounting Kit x1	• DVI-I to VGA Adaptor x 1

Optional Modules and Accessories

Model No.	Description
CFM-PoE01	CFM Module with PoE Control Function, Individual Port 25.5W
CFM-IGN01	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable
CMI-LAN01-R12	CMI Module with 4x RJ45 Intel I210 1GbE LAN Ports
CMI-2P5GLAN01-R10	CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port
CMI-10GLAN05-R10	CMI Module with 2x Intel 10GbE LAN, RJ45 Port
CMI-M12LAN01-R12	CMI Module with 4 x M12 Intel I210 1GbE LAN Ports
CMI-XM12LAN01-R10	CMI Module with M12 X-Coded Connector, 4x Intel I210 1GbE LAN Ports
CMI-10GXM12LAN01-R10	CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector
CMI-CAN01-R10	CMI Module with 2x CAN FD Ports
CMI-DIO01	CMI Module with 16DIO (8in 8out)
CMI-COM01	CMI Module with 2x RS232/422/485 (Support 5V/12V)
MEC-COM-M212-TDB9	Mini-PCle Module with 2x RS-232 Serial Ports, 1x Thin DB9 Cable
MEC-COM-M334-TDB9	Mini-PCle Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable
MEC-LAN-M102-30	Mini-PCle Module with 2x LAN Ports, 2x 30cm cable
UB0930-R10	Universal Bracket with 4x M12 X-Coded Cutout
UB0932-R10	Universal Bracket with 3x Antenna Cutout
UB1303	Universal Bracket with 2x DB9 Cutout
UB1311	Universal Bracket with 2x RJ45 Cutout for MEC-LAN Expansion
UB1318	Universal Bracket with DIO Cutout
UB1710-R10	Universal Bracket with 4x M12 A-Coded Cutout
UB1712-R10	Universal Bracket with 4x RJ45 Cutout
UB1728-R10	Universal Bracket with 2x RJ45 Cutout for CMI-10GLAN Expansion

UB1737-R10	Universal Bracket with 2x M12 X-coded Cutout
UB1738-R10	Universal Bracket with 2x DB9 and 1x Switch Cutout for CMI-CAN Expansion
SIDE-DX	DX Series side mount kit
DIN01	DIN-RAIL Mount Kit, KMRH-K175
GST220A24-CIN	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug and Tubes, Level VI
GST360A24-CIN	Adapter AC/DC 24V 15A 360W with 3pin Terminal Block Plug and TUBES, Level VI
RSD-200D-24	Railway Single Output DC-DC Converter 200W / DC 24V
FAN-EX101	External Fan with 4pin Terminal Block Plug and Mounting Bracket, Support smart fan
PPM-I360-01-R10	360W Power Protection Module for DV/DX Series

Optional Module Configuration

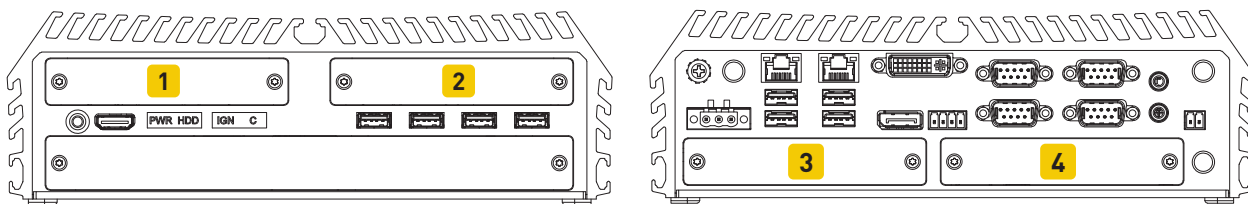

Model No.	Description	1	2	3	4
UB0932-R10 	Universal Bracket with 3x Antenna Cutout	V	V	V	V
CMI-LAN01-R12/UB1712-R10 	CMI Module with 4x Intel I210 1GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout	V	V	-	-
CMI-2P5GLAN01-R10/UB1712-R10 	CMI Module with 4x Intel 2.5GbE LAN, RJ45 Port / Universal Bracket with 4x RJ45 Cutout	V	V	-	-
CMI-10GLAN05-R10/UB1728-R10 	CMI Module with 2x Intel 10GbE LAN, RJ45 Port/ Universal Bracket with 2x RJ45 Cutout	V	V	-	-
CMI-M12LAN01-R12/UB1710-R10 	CMI Module with M12 Connector, 4x Intel 1GbE LAN / Universal Bracket with 4x M12 A-Coded Cutout	V	V	-	-
CMI-XM12LAN01-R10/UB0930-R10 	CMI Module with M12 X-Coded Connector, 4x Intel I210 1GbE LAN Ports / Universal Bracket with 4x M12 X-Coded Cutout	V	V	-	-
CMI-10GXM12LAN01-R10/UB1737-R10 	CMI Module with 2x Intel 10GbE LAN, M12 X-Coded Connector / Universal Bracket with 2x M12 X-coded Cutout	V	V	-	-
CMI-CAN01-R10 /UB1738-R10 	CMI Module with 2x CAN FD Ports / Universal Bracket with 2x DB9 and 1x Switch Cutout for CMI-CAN Expansion	V	V	-	-
CMI-DIO01/UB1318 	CMI Module with 16DIO (8in 8out) / Universal Bracket with DIO Cutout	-	-	-	V
CMI-COM01/UB1303 	CMI Module with 2x RS232/422/485 (Support 5V/12V) / Universal Bracket with 2x DB9 Cutout	-	-	-	V
MEC-COM-M212-TDB9/UB1303 	Mini-PCle Module with 2x RS-232 Serial Ports, 1x Thin DB9 Cable / Universal Bracket with 2x DB9 Cutout	-	-	V	V
MEC-COM-M334-TDB9/2xUB1303 	Mini-PCle Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable / 2x Universal Bracket with 2x DB9 Cutout	-	-	V	V
MEC-LAN-M102-30/UB1311 	Mini-PCle Module with 2x LAN Ports, 2x 30cm cable / Universal Bracket with 2x RJ45 Cutout for MEC-LAN Expansion	-	-	V	-

V : Compatible